


0.2" DEFLECTION NEOPRENE CEILING HANGERS FOR WIRE OR HORIZONTAL ATTACHMENT

All Metal Parts are
Zinc Electroplated

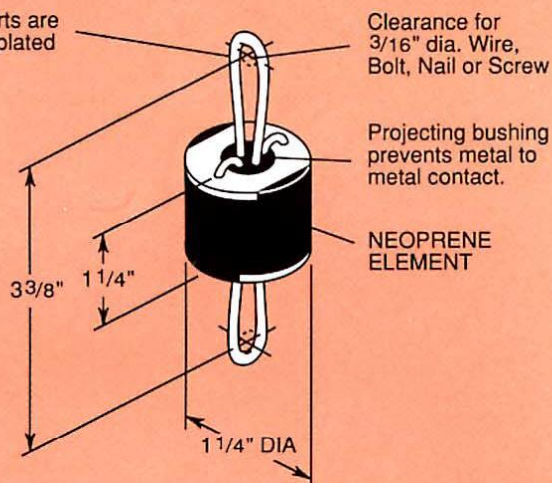

NOTE –
Tested to Failure at 1200 lbs.

Ratings for Neoprene Ceiling Hangers

Type	Size (Duro-meter)	Rated Capacity Range (lbs)	Rated Defl (in)	Color Mark
WHR-	40	Up to 60	0.20	Green
	50	55-95	0.20	Red
	60	90-155	0.20	White
	70	150-220	0.20	Yellow

Hanger elements have straight line deflection curves.

W HANGER INSTALLATION METHODS




Secured by Wire



Bolted to Ceiling Channel



Bolted to Straps

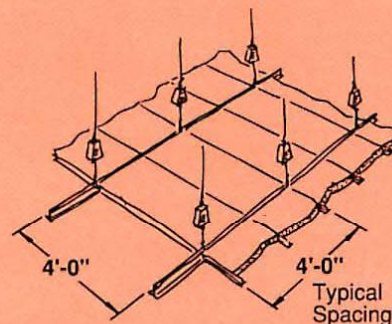

TYPE W as Ceiling Hangers

W Hanger Selections Based on Ceiling Weight

Ceiling Description	Ceiling Wt. (lbs/ft ²)	Load Per Hanger (48"oc) (lbs)	W30 W30N WHS WDNHS Hanger Selections		
			WHD	WHR	
1" Acoustical Ceiling Tile	2.5	40	X54	-WHITE or A-BLACK	40
1 1/2" Metal Lath and Gypsum Plaster	10.0	160	X175	B-RED	70
2 Layers 1/2" Gypsum Board	5.0	80	X113	A-RED	50
2 Layers 3/4" Gypsum Board	7.5	120	X130	A-RED	60

PRODUCT FINISHES

All standard products have a painted finish unless otherwise indicated.

Special finishes include:

- Zinc Chromate
- Neoprene Dipping
- Cold Galvanized Paint
- Epoxy Finish
- Hot Dipped Galvanized Holders with Electro-Galvanized or Cadmium Plated Hardware, depending on size and method of attachment. Springs in these holders will be made rust resistant.



MASON INDUSTRIES, INC.

350 Rabro Drive • Hauppauge, NY 11788 • 516/348-0282 • FAX 516/348-0279
708 North Valley Street, Suite K • Anaheim, CA 92801 • 714/535-2727 • FAX 714/535-5738